

KPM150HIII

Compact ticket printer for OEM integration

- High print quality (200 DPI)
- Paper width: from 20mm to 54mm
- Paper weight: from 80 to 180 g/m²
- Printing > 180 mm/sec
- RS232 and USB interfaces
- Highly reliable cutter: over 1,000,000 cuts
- 1D and 2D barcode printing: UPC-A, UPC-E, EAN13, EAN8, CODE39, ITF, CODABAR, CODE93, CODE128, CODE32, PDF417, DATAMATRIX, AZTEC, QR CODE
- True Font character support; Font: any language available
- Sensors: fully adjustable lower optical sensor, to suit any ticket width; upper optical sensor, gap sensor; near paper end sensor




CHARACTERISTICS

- High durability thanks to the robust internal steel structure
- Highly reliable
- 266 MHz processor

APPLICATIONS:

- Parking tickets
- Metro and bus tickets
- Airports: bag tags
- Self service ticketing
- Event tickets
- Hospital and theme parks wristband printing

SOFTWARE:

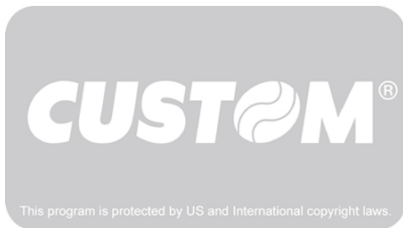

SOFTWARE PrinterSet : to update logos, edit characters, set operating parameters and update the printer firmware. It allows you to create a file including the different SW customizations and send them to the printer via the interface provided, for easy and fast setting.

- Remote monitor status
 - Auto-installing driver for Win 7, 8, 8.1, 10 (+32/64bit support)
 - CustomPowerTool
-

ACCESSORIES



CUT&HOLD KIT - The printer is equipped with a Cut&Hold device as accessory, which avoids the ticket falling on the ground after print out.


What is in the box:

- Device, adapter cable, additional low paper sensor with cable
-

TECHNICAL SHEET

| | |
|------------------------|--|
| Printing Method | Thermal with fixed head |
| Number of dots | 8 dots/mm |
| Resolution | 203 DPI |
| Printing (mm/sec) | >180 mm/sec |
| Character set | PC437, PC850, PC860, PC863, PC865, International |
| Printing Format | Normal, height and width 1x to 2x, reverse |
| Printing Direction | Straight, 90°, 180°, 270° |
| Paper width | From 20 mm to 54 mm |
| Paper weight | from 80 to 180 g/m ² |
| Emulation | CUSTOM/POS |
| Interfaces | RS232 + USB |
| Data Buffer | 4 KB |
| Flash Memory | 16 MB |
| Graphic Memory | 2 logos - 384 x 341 dots |
| Drivers | Win 7, 8, 8.1, 10 (+32/64bit support) |
| Software Tools | Status Monitor, PrinterSet, CustomPowerTool |
| Power supply | 24 Vdc ± 10% |
| Medium consumption | 0.9A (12.5% dots turned on) |
| Head Life | 100 Km / 100M pulses |
| MCBF | 1,000,000 cuts |
| Operating temperature | 0°C + 50°C |
| Dimensions | 171x122(h)x114 mmwith Ticket Retention Kit 198.5x122(h)x114 mm |
| Weight | 1.85 Kg |

MODELS



915FB030100300

PRINTER KPM150HIII USB RS232

CUSTOM SPA - Via Berettine, 2 - 43010 Fontevivo PR - VAT: IT02498250345 - TEL: +39 0521 680111 - FAX: +39 0521 610701 - UNIQUE CODE: T180WIO

The technical data on this website are not binding and may be changed without advanced notice.

Last update: 16 July 2020